


● FLEX-LOK STEP INSERT

A series of polypropylene inserts for the purpose of securing steps in the wall of a precast concrete manhole or other concrete structure.

BENEFITS:

- Placement of insert is done at the time of manufacture.
- Concrete wall remains watertight.
- Guaranteed alignment and projection of steps.
- Precise hole to accept step shank.
- Interference fit makes installation of step rapid and simple.
- Polypropylene offers excellent chemical resistance.

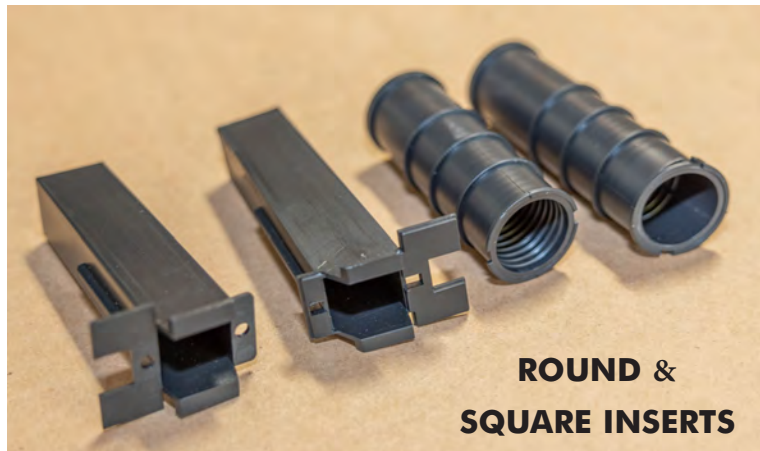

SPECIFICATIONS:

- Insert meets the requirements of ASTM C-478 section 16.
- Exceeds the performance test procedures of ASTM C-497 section 11.

WARNING

Please be advised, the Flex-Lok Step Insert is used exclusively for the placement of manhole steps for egress into and out of manhole structures, inlets, or vaults. It is designed to meet section 11 of ASTM C-497 and section 16 of ASTM C-478; the step and insert are not designed or intended to be used for lifting, hoisting, or to fasten any type of scaffolding or platforms within the precast structure. Use of the Flex-Lok Step Insert for anything other than its designated purpose is a safety hazard and is strictly prohibited.

